
**Leybold Specs**

Contact Info: Office: 309.756.0955

Fax: 309.756.0957

sales@tmsvacuum.com

Model	CFM	Weight	HP	Oil Capacity
D2A	2.2	41	0.33	0.5
D4A	4.5	45	0.33	0.75
D8A	7	80	.75/1.0	1
D16A	14.1	85	.75/1.0	1.25
D30A	26.8	196	1.5	3.5
D60A	36.7	226	2	4
D90A	53.7	226	3	4
D1.6B	1.24	20	0.16	.17/.23
D4B	3.4	51	0.33	.32/.85
D8B	6.9	65	.75/1.0	.32/.95
D16B	13.4	78	1	.5/1.1
D25B	20.9	85	1.5	.5/1.5
D40B	32.5	184	3	1.8/2.7
D65B	53	203	3	2.1/3.4
SV-40	33	90	2	1.8/2.7
SV-65	46	106	3	2
SV-100	71	203	50	3.7
SV-180	127	340	7.5	3.7
SV-280	198	428	12	9
SV-200	130	341	7.5	5.3
SV-300	200	429	10	9
SV-630	495	1389	25	37
SV-630F	495	1389	25	37
WA150/151	108	194	1.5	0.55
WA250/251	179	205	1.5	0.55
WA500/501	357	304	3	0.75
WA1000/1001	707	509	5	1.3
WA2000/2001	1449	918	10	2.1
WS150/151	108	206	1.5	0.55
WS250/251	179	216	1.5	0.55
WS500/501	357	304	3	0.75
WS1000/1001	707	526	5.4	1.3
WS2000/2001	1449	1046	10	2.1
WAU150/151	108	202	1.5	0.55

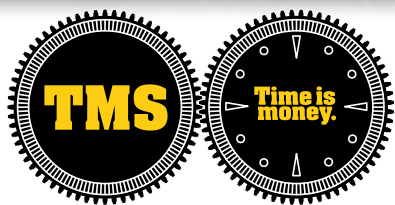

Contact Info: Office: 309. 756.0955

Fax: 309.756.0957

sales@tmsvacuum.com

Leybold Specs Continued

Model	CFM	Weight	HP	Oil Capacity
WAU250/251	179	213	1.5	0.55
WAU500/501	357	311	3	0.75
WAU1000/1001	707	520	5	1.3
WAU2000/2001	1449	931	10	2.1
WSU150/151	108	216	1.5	0.55
WSU250/251	315	227	1.5	0.55
WSU500/501	357	315	3	0.75
WSU1000/1001	707	537	5.4	1.3
WSU2000/2001	1449	1061	10	2.1
DK100	68	560	5	2.1/0.4
DK200	132	830	7.5	4.2/0.4
E150	100	580	5	5.3/0.4
E250	171	830	7.5	8.5/0.4